

ATS

Y TYPE

Easy

Digital

Design

Yes

Description

ATS Y TYPE uses our unique ATS controller, ACU-MP5 which is connected to ATS by connector for the first time in Korea, so that it is easy to install and extra wiring work is not necessary.



Key Features

- Remote control and monitoring : RS 485 communication
- Detects 3P of commercial power



Mechanical Features

- Controlled by one coil
- Accurate movement of latch
- Control interface is located on the right side - easy to connect

Specifications

- Rating Volt. : 600Vac, 50/60Hz, 125Vdc
- Rating Curt. : 100A, 200A, 400A
- Number of Poles : 2, 3, 4 Poles
- Operating Way : 2 POSITION
- Connecting Way : FRONT
- Input Volt./Curt. : 220Vac±20%, within 10A
- Transferring Time : 15ms
- Contact Parting Time : 10ms
- Chattering Time : 3ms

Connection Circuit

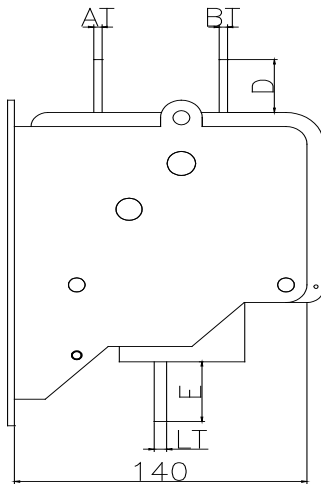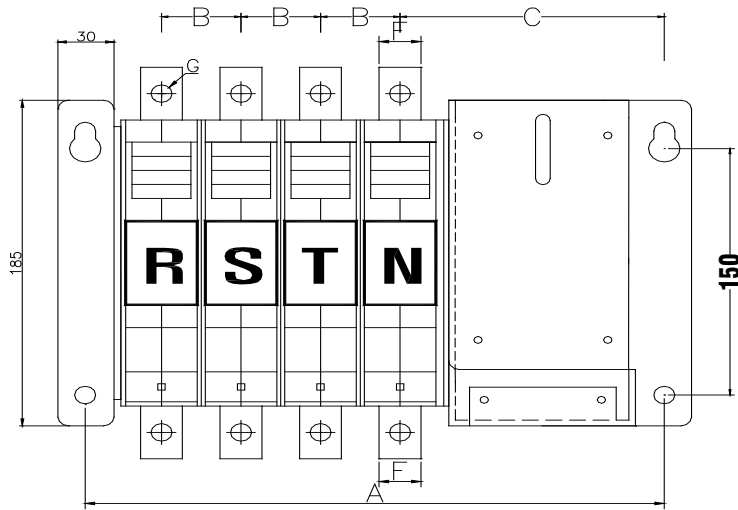

TYPE	Y1	Y2	Y4						
A	2P	208	208	226					
	3P	246	246	274					
	4P	284	284	322					
B	38	38	48						
C	140	140	145						
D	30	30	39						
E	34	34	44						
F	20	20	30						
AT	4.8	4.8	5						
BT	4.8	4.8	5						
LT	6	6	6						
Weight	2P	3P	4P	2P	3P	4P	2P	3P	4P
	8	9	10	8	9	10	8	10	11

Miscellaneous

- RS 485 MODBUS RTU PROTOCOL
- Operating Temperature(°C) : -20~40
- Manufactured according to KEMC 1112



엔진 발전기 제어 전문기업

이지콘 (주)

Tel : 82-32-677-9806
9807

Fax : 032-677-

<http://www.egcon.co.kr>

sales@egcon.co.kr