

ECU

RC2

E

asy

D

igital

D


esign

Y

es

Description

ECU-RC2 is a control device that can remotely or manually start and stop an engine generator.

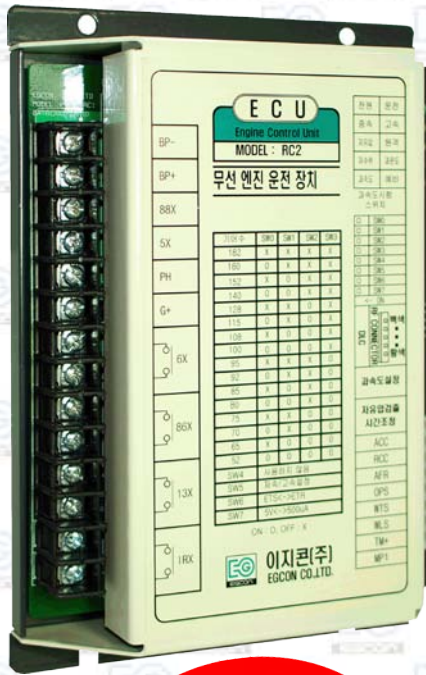

Key Features

- Remotely starts and stop machine
- Remotely control engine idle/run speed
- Able to operate engine manually
- Supplies power to AVR at over run speed
- Protects engine from low oil press., high water temp., over speed and low water level
- Can use RPM meter
- Can select engine stop mode
- Dry contact for operation signal and fault signal


Mechanical Features

- Panel built-in type
- Anti humidity and anti vibration treatment : silicone coating
- Two adjusting resistances make manipulating easy
- Extra terminal that displays operation state included.


Specifications

- Power Input : 8~35Vdc
- Generator Input : 1P, 220Vac
- Speed Detection by MPU(7Hz, 20Vac)
- Remotely Controllable Range : 700m(on the flatland)

Connection Circuit

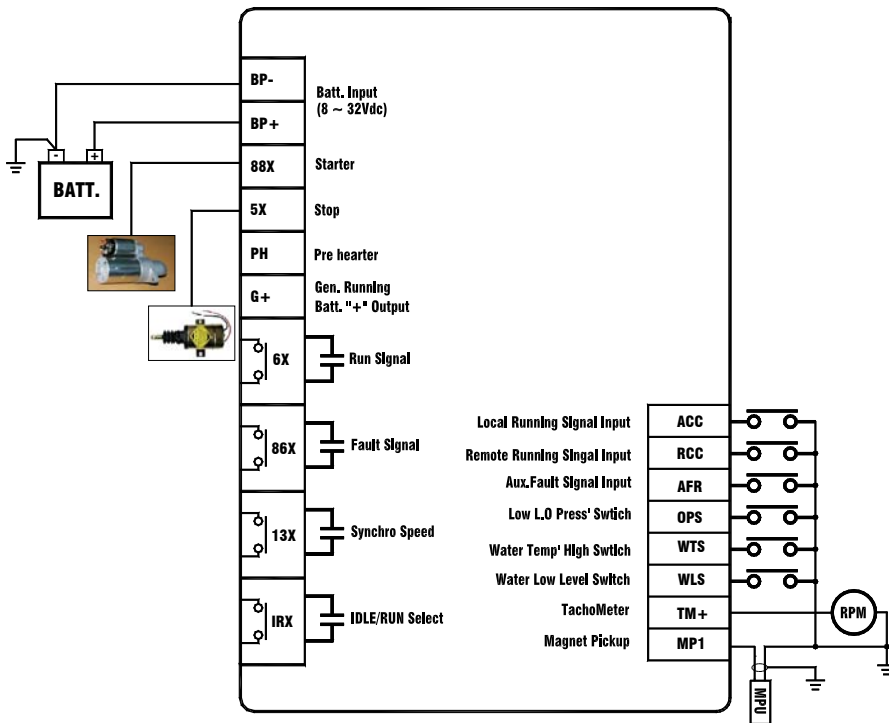

Dimension(mm)

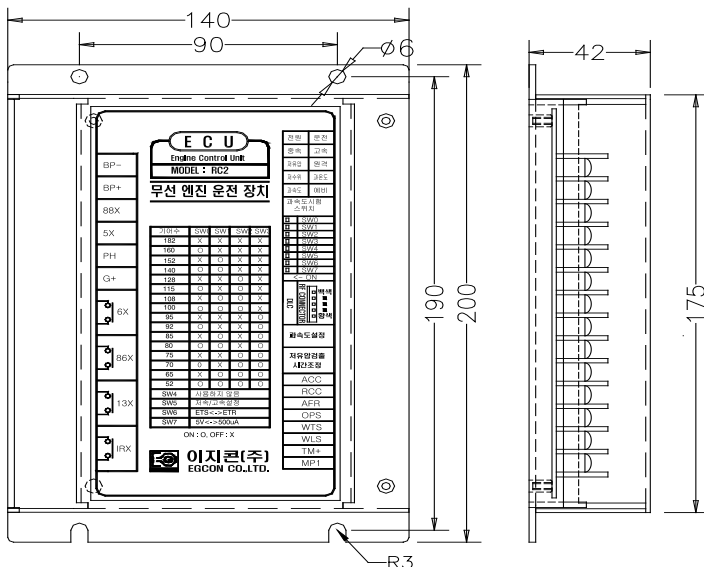

Miscellaneous

- Operating Temperature(°C) : -20~60
- Weight(kg) : 1
- Material of Case : Steel
- Contact Capacity of Start/Stop : 30Vdc, 15A
- Contact Capacity of State Indication : 30Vdc, 5A
- Output of RPM Meter : 5V, 500uA



Engine generator control enterprise
EGCON CO., LTD

Tel : 82-32-677-9806
 Fax : 82-32-677-9807
 Email : sales@egcon.co.kr
 Web : www.egcon.o.kr